

Contents

Wolf Gas Rangetops
Safety Instructions4
Gas Rangetop Features8
Gas Rangetop Operation9
Gas Rangetop Care
Service Information
Wolf Warranty

Features and specifications are subject to change at any time without notice. Visit our website, wolfappliance.com for the most up-to-date information.

IMPORTANT NOTE: Throughout this guide, dimensions in parentheses are millimeters unless otherwise specified.

Important Note

To ensure the safe and efficient use of Wolf equipment, please take note of the following types of highlighted information throughout this guide:

IMPORTANT NOTE highlights information that is especially important.

CAUTION signals a situation where minor injury or product damage may occur if instructions are not followed.

WARNING states a hazard that may cause serious injury or death if precautions are not followed.




Thank You

Your purchase of a Wolf gas rangetop attests to the importance you place upon the quality and performance of your cooking equipment. We understand this importance and have designed and built your gas rangetop with quality materials and workmanship to give you years of dependable service.

We know you are eager to start cooking, but before you do, please take some time to read this use & care guide. Whether you are a beginning cook or an expert chef, it will be to your benefit to familiarize yourself with the safety practices, features, operation and care recommendations of the Wolf gas rangetop.

Your Wolf gas rangetop is protected by a warranty that is one of the finest in the industry. Take a moment to read the warranty statement at the end of this guide and refer to it should service become necessary. **IMPORTANT NOTE:** Wolf gas rangetops are manufactured for use with natural gas or LP gas. Check the product rating plate for the type of gas for your specific model. If this appliance does not correspond to your type of gas, contact your authorized Wolf dealer.

The rating plate is located under the drip pan that supports the cooking grates, inside the left side panel of the rangetop. Refer to the illustration below. The rating plate for French top models (except model RT484F) is located inside the right side panel.



Location of rating plate (inside panel).

Safety Instructions 4

IMPORTANT INSTRUCTIONS

A WARNING

If the information in this guide is not followed exactly, a fire or explosion may result, causing property damage, personal injury or death.

IMPORTANT NOTE: Read all safety instructions before using this appliance.

- Installation and service must be performed by a qualified installer, service agency or the gas supplier.
- Warranty service must be performed by a Wolf authorized service center.
- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- A ventilation hood is recommended for use with the Wolf gas rangetop.

WHAT TO DO IF YOU SMELL GAS:

- Do not try to light any appliance.
- · Do not touch any electrical switch.
- · Do not use any phone in your building.
- Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
- If you cannot reach your gas supplier, call the fire department.

GENERAL SAFETY REQUIREMENTS

- Read this use & care guide carefully before using your new gas rangetop to reduce the risk of fire, electric shock or injury to persons.
- Ensure proper installation and servicing. This appliance must be properly installed and grounded by a qualified technician.
- Have installer show you where the gas supply shut-off valve is located in your home. Learn how and where to turn off the gas to the rangetop.
- Before performing any service, turn off the gas supply by closing the gas shut-off valve and unplug the rangetop power cord from the wall receptacle.
- Keep igniters clean and dry for proper lighting and performance for the burners.
- In the event that a burner goes out and gas escapes, open a window or a door. Wait at least five minutes before using the rangetop.
- Keep appliance area clear and free from combustible material.
- When cooking, set burner controls so that the flame heats only the bottom of the pan and does not extend beyond the bottom of the pan.
- Wear proper apparel. Never let loose clothing or other flammable materials come in contact with the burners while in operation. Fabric may ignite and cause personal injury.

IMPORTANT INSTRUCTIONS

GENERAL SAFETY REQUIREMENTS

- When deep fat frying, be certain that the pan is large enough to accommodate the desired volume of food without overflow caused by bubbling of the fat. Never leave a deep fat fryer unattended. Avoid deep fat frying of moist or frost-covered foods, as foods with high water content may cause spattering or spilling of the hot fat. Heat fat slowly, and stir together any combinations of oils and fats prior to applying heat. Utilize a deep fat frying thermometer to avoid heating the fat to temperatures above the flash point.
- Always use dry pot holders when removing pans from the rangetop. Wet or damp pot holders can cause steam burns. Do not use a towel or bulky cloth in place of pot holders.
- Choose pans with easily grasped handles that will stay cool while cooking. Refer to cookware selection on page 21.
- Always turn panhandles inward so they do not extend over adjacent work areas, burners or the edge of the rangetop.
- Always check the positions of the control knobs to make certain the rangetop is off when you are finished cooking.
- Always light each burner prior to placing a pan on the burner grate. Also, turn the control knob to the OFF position before removing a pan from the burner grate.

- Keep any ventilation filters clean to avoid grease fires.
- Always set pans gently onto the grates and center them so that they are well balanced.
- Start the ventilation hood approximately five minutes before cooking. This establishes an air curtain and improves the capture of vapor and moisture.
- Clean only those parts listed in this guide.

Safety Instructions 6

IMPORTANT INSTRUCTIONS

GENERAL SAFETY REQUIREMENTS

- Do not repair or replace any part of the rangetop unless specifically recommended in literature accompanying this appliance. All service should be referred to a qualified technician.
- Do not obstruct the flow of air. Your kitchen must have an adequate supply of fresh air to ensure proper combustion and ventilation.
- Do not use aluminum foil to line any part of the rangetop.
- Never use the rangetop to warm or heat the room.
- Do not block or obstruct the holes in the rangetop surface below the control knobs. Blocking these holes may affect burner operation and may result in a hazard.
- When using the rangetop, do not touch the grates, burner caps, burner bases or any other parts in proximity to the flame. These components may be hot enough to cause burns.
- If the rangetop is near a window, do not use long curtains as a window treatment, as they could blow over the rangetop and create a fire hazard.
- Do not leave children alone or unattended in the area where the rangetop is in use. Never allow children to sit or stand on the appliance. Do not let children play with the rangetop.
- Do not store items of interest to children above or at the back of the rangetop, as they could climb on the appliance to reach items and be injured.

- Do not use water on grease fires. Smother the flame or use a dry chemical or foam-type extinguisher.
- Never leave the appliance unattended when in use.
 Boilovers and greasy spills may smoke or ignite.
- Do not cover the burners and grates with anything except properly selected utensils. Decorative covers should not be used.
- Do not heat unopened food containers, such as baby food jars and cans. Pressure build-up may cause the container to burst and cause injury.
- Do not store flammable materials near burners or let grease or other flammable substances accumulate on the rangetop.
- Do not use abrasive or caustic cleaners or detergents on this appliance, as these may cause permanent damage. Do not use aerosol cleaners, as these may be flammable or cause corrosion of metal parts.
- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- Do not clean the rangetop while it is still hot. If using a damp sponge or cloth, wait until the rangetop has cooled sufficiently to prevent steam burns. Also, some cleaners can produce harmful or unpleasant fumes if applied to hot surfaces. Refer to care recommendations on pages 19–20.
- Do not allow aluminum foil, plastic, paper or cloth to come in contact with a hot burner or grate. Do not allow pans to boil dry.

SAFETY PRECAUTIONS

A WARNING

TO REDUCE THE RISK OF INJURY TO PERSONS IN THE EVENT OF A RANGETOP GREASE FIRE, OBSERVE THE FOLLOWING:

Smother flames with a close-fitting lid, baking sheet or other metal tray; then turn off the gas burner. Be careful to prevent burns. If the flames do not go out immediately, evacuate and call the fire department.

Do not use water on grease fires.

Never pick up a flaming pan, you may be burned.

USE AN EXTINGUISHER ONLY IF:

- You know you have a class ABC extinguisher and you already know how to operate it.
- The fire is small and contained in the area where it started.
- The fire department is being called.
- You can fight the fire with your back to an exit (NFPA fire safety tips).

CALIFORNIA PROPOSITION 65

A WARNING

Burning gas cooking fuel generates some byproducts that are on the list of substances known to cause cancer or reproductive harm. To minimize exposure to these substances, always operate this unit according to the instructions contained in this guide and provide good ventilation.

COMMONWEALTH OF MASSACHUSETTS

- Installations and repairs must be performed by a qualified or licensed contractor, plumber or gas fitter, qualified or licensed by the state, province or region where this appliance is being installed.
- Use only gas shut-off valves approved for use within the state, province or region where this appliance is being installed.
- A flexible gas connector, when used, must not exceed 3' (.9 m).

Gas Rangetop Features

- Heavy-duty stainless steel exterior.
- Dual brass burners with flame recognition and automatic reignition for safety and ease of use.
- Porcelain-coated, cast-iron burner grates for easy cleaning and durability.
- Top configurations including: infrared charbroiler, infrared griddle and French top with stainless steel
- Signature red control knobs with four position settings and chrome bezels.
- Stainless steel drip tray on ball bearing slides.
- · CSA certified for US and Canada.
- Two and five year residential warranty—exclusions apply—see warranty at the end of this guide.

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

Burner Rating	Btu (kW)	Btu (kW)
SURFACE BURNERS 4–8 Burners	HIGH 16,000 (4.7)	SIMMER 500 (.1)
OPTIONAL FEATURES Infrared Charbroiler Infrared Griddle Double Griddle French Top		16,000 (4.7) 18,000 (5.3) 36,000 (10.6) 15,000 (4.4)


OPTIONAL ACCESSORIES

Optional accessories are available through your authorized Wolf dealer. To obtain local dealer information, visit the locator section of our website, wolfappliance.com.

- 10¹/₂" (267) classic stainless steel riser.
- Stainless steel island trim.
- Black control knobs.
- · Cast iron S-grates and wok grate.
- Hardwood cutting board and griddle cleaning kit (griddle models).
- High altitude conversion kit.

GAS RANGETOP

Model RT484CG shown

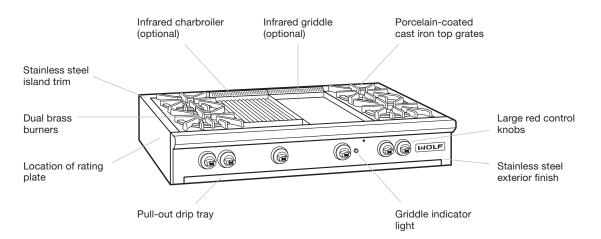

Surface Burners

A spark electrode ignites each surface burner. This control eliminates the need for continuous open flame pilots. For added safety and convenience, each burner is designed with an electronic reignition system. This feature enables any burner to relight automatically in the event it is accidentally extinguished.

BURNER ASSEMBLY


After removing burner parts for cleaning, it is important that you reassemble the burners correctly. Refer to the illustrations below for proper alignment of the base and upper burner parts. The center burner cap does not have a special orientation but should be seated flat.

A CAUTION


Failure to position the burner parts correctly could cause flames or gas to escape and burn between parts, resulting in poor combustion or damage to your gas rangetop.


GRATE PLACEMENT

Position the porcelain-coated, cast iron burner grates with the five fingers of each grate facing toward the front of the gas range. The back of each grate has three fingers. Refer to the illustration below.



Grate placement.





Burner base.

Upper burner.

Surface Burners


CONTROL KNOBS


The control knobs are positioned to correspond to the surface burners they regulate. Each knob is designed as a push-to-turn knob. Even though this is a child-safe design, children should never be left unattended near the rangetop while it is in use.

To light a surface burner, push in and turn the control knob counterclockwise to HIGH. You will hear a clicking sound. This is the electronic igniter. Once the burner is lit, continue turning the knob counterclockwise to the desired setting. There are four settings—HIGH, MED (medium), LOW and SIM (simmer). You will feel a slight detent in the knob rotation when each setting is aligned.

MANUAL LIGHTING

In case of a power outage, you can relight the surface burners manually. Turn the control knob to HIGH, then light the burner using a BBQ lighter. Refer to the illustration below.





Surface burner control knob.


Manual lighting.

FLAME HEIGHT AND APPEARANCE


Select a flame that is just high enough to maintain the desired cooking speed and is sized to fit the base diameter of the pan. Never extend the flame beyond the base of the pan. Refer to the illustrations below.

A natural gas flame should be blue with a deeper blue core. There should be minimal trace of a yellow flame. A yellow flame indicates an improper mixture of air and gas or impurities in the gas supply to the range. If this occurs consistently, call a Wolf authorized service center to adjust the mixture. With LP gas, some yellow tipping to the flame is acceptable and may not require adjustment.

A "popping" sound may be noticed with LP gas when the surface burner is turned off. This is normal.







Surface burner on HIGH.

Surface Burners

TEMPERATURE SETTING GUIDE

SETTING	USES
SIM (simmer)	Melting, holding chocolate Melting butter Heating, holding delicate sauces Warming foods Melting large quantities Simmering sauces Steaming rice
LOW Heat	Frying eggs Heating milk, cream sauces and soups, gravies and puddings Panfrying Simmering large quantities Boiling vegetables in water
MED (medium) Heat	Sautéing Browning Braising Quick frying
HIGH Heat	Boiling water Heating broth soups, stocks Deep fat frying (to heat oil only) Fast boiling large quantities

A CAUTION

Never leave pans on a HIGH setting unattended. Be careful when cooking food in fat or grease; it can become hot enough to ignite.

BEFORE USING FOR THE FIRST TIME

Before using for the first time, you should clean your rangetop thoroughly with hot water and a mild detergent. Rinse and dry with a soft cloth. This removes any residual oil and grease left on the surface from the manufacturing process. Refer to care recommendations on pages 19–20.

IMPORTANT NOTE: Before using your gas rangetop, check that the surface burners are assembled correctly.

The optional griddle and French top need to go through a "burn in" period to clean oils from the bottom of these assemblies. To prevent food from sticking and to protect the surface from moisture, it is necessary to season the griddle and French top prior to use. Refer to the following pages for specific instructions on using the optional charbroiler, griddle and French top.

The use of proper cookware is very important. Refer to cookware selection on page 21 for recommendations.

Infrared Charbroiler

The optional charbroiler has an infrared burner to give the most efficient method of gas grilling. The burner becomes an orange-red color at the surface of the ceramic tile. When it glows, it transfers intense heat to the food. This sears the outside of the food to lock in juices and flavor.

IMPORTANT NOTE: Cook food directly on the charbroiler grate, do not use cookware.

INSTALL BLANK-OFF PLATE


To convert the charbroiler to a lower heat output for more even cooking, install the blank-off plate provided with your gas rangetop. This stainless steel plate is placed directly on the ceramic tiles.

Install the blank-off plate when the charbroiler is off and is completely cool. Be sure to remove the plastic film from the blank-off plate before installing.


To install the blank-off plate, remove the stainless steel grate and wire mesh screen. Position the blank-off plate in the middle of the ceramic tiles. Reinstall the wire mesh screen with the notch at the left rear. Reinstall the grate. Refer to the illustrations below.

A CAUTION

Use caution when positioning the blank-off plate to avoid damage to the ceramic tiles. Avoid contact with the igniter; it is fragile and can chip or break.







Blank-off plate.

Infrared Charbroiler


CHARBROILER OPERATION

IMPORTANT NOTE: The stainless steel cover must be removed prior to operation of the charbroiler.

- Turn the control knob counterclockwise to the HIGH setting. You will hear the clicking sound of the igniter lighting the burner.
- Preheat the charbroiler for about 10 minutes before adding food. The ceramic tiles will have an orange-red glow.
- To turn the charbroiler off, turn the control knob clockwise to the OFF position.

A WARNING

To prevent flare-ups, never leave the charbroiler unattended during use.



Charbroiler control knob.

CHARBROILING TIPS

- Turn on the ventilation hood five minutes prior to using the charbroiler.
- If the knob is not set fully at HIGH, the burner may turn blue and the automatic igniter will begin sparking. Turn the knob back to HIGH.
- Always select lean meat or trim fat before grilling.
 Flaming may occur when grilling meat and poultry with excessive fat.
- To minimize flare-ups when grilling chicken breasts and thighs, remove the skin. Brush pieces with peanut or vegetable oil to reduce sticking to the grate.
- If flare-ups occur, quickly move the food to another place on the grate with long tongs.
- · Apply basting sauce halfway through cooking time.
- Use a minute timer as a reminder to turn the food over halfway through cooking time.
- Leave the charbroiler on for approximately 10 minutes after grilling is complete. This allows for easier cleaning after the charbroiler has cooled sufficiently.
- The suggested grilling times in the charbroiler grilling guide on the following page are approximate. Actual times depend on the quantity, thickness and starting temperature of the food.

Infrared Charbroiler

CHARBROILER CARE

To keep the charbroiler looking its best, it is recommended that you clean it after every use. Allow the charbroiler surface to cool sufficiently before cleaning.

- Charbroiler Grate (stainless steel): When cool, lift off and set in the sink. Pour very hot water over the cooked-on residue. Cover with wet dish towels and pour more hot water over it. Allow the hot, moist conditions to help loosen the residue. Remove remaining food soil with a soap-filled scouring pad. Rinse and dry.
- Charbroiler Frame (stainless steel): Remove from the rangetop. Soak in hot water and dish detergent. Wash thoroughly, scrubbing with scouring pad, if needed.
- Blank-off Plate (stainless steel): Wash with hot water and detergent. Use a soap-filled scouring pad to remove as much cooked-on food soil as possible. The plate will turn a metallic blue color due to the high heat; this is a permanent change.
- Igniter (ceramic): Avoid contact with the igniter; it is fragile and can chip or break.
- Mesh Screen (stainless steel): Use a wire brush to loosen any charred food particles.

CHARBROILER GRILLING GUIDE

FOOD	GRILLING TIME*	
BEEF		
Ground beef patties,		
1 lb (.5 kg), ¹ / ₂ " (13) thick	12-15 min (medium well)	
Steaks, 1/2" (13) to 3/4" (19) thick	8-9 min (rare)	
	10-12 min (medium)	
	14-16 min (well done)	
CHICKEN		
Breasts, boneless and skinless	20-23 min	
Breasts, bone in	30–33 min	
Thighs, boneless and skinless	30 min	
FISH		
Steaks, $\frac{1}{2}$ " (13) to $\frac{3}{4}$ " (19) thick	10–12 min	
FRESH VEGETABLES		
Bell peppers	10–12 min	
Corn on the cob, husked	15–20 min	
Corn on the cob, in the husk	30-40 min	
Mushrooms	6–7 min	

^{*}Grilling times are with the blank-off plate installed.

Infrared Griddle

The optional griddle is thermostatically controlled, which means once the set temperature is reached, the heat cycles to hold that temperature. To prevent food from sticking and to protect the surface from moisture, it is necessary to "season" the griddle prior to use. This seasoning process as well as general use will change the appearance of the griddle.


SEASON THE GRIDDLE

- The griddle is shipped with a protective oil coating the surface, use hot water and detergent to clean. Rinse and dry.
- Turn on the ventilation hood five minutes prior to using the griddle.
- The griddle needs to go through a "burn in" period.
 Turn the griddle on at 350°F (175°C) for 30 minutes to clean oils from the bottom of the griddle. After 30 minutes, turn the griddle off and allow it to cool.
- To season, pour a teaspoon (5 ml) of peanut or vegetable oil per single griddle in the center; spread evenly with a paper towel, avoiding the corners. Be careful not to apply too much oil. Excess oil will leave a gummy residue that will have to be removed.
- Push and turn the control knob to 350°F (175°C). Heat until you see the first signs of smoke. Turn the griddle off. When the griddle has cooled and is only slightly warm, wipe off any excess oil. Let the griddle cool completely.
- Repeat with another teaspoon of oil. The brown appearance will darken with use.

GRIDDLE OPERATION

IMPORTANT NOTE: The stainless steel cover must be removed prior to operating the griddle.

- Turn on the ventilation hood five minutes prior to using the griddle.
- To heat the griddle, push in the control knob and turn counterclockwise to the desired temperature. It is normal to hear a clicking sound. This is the electronic ignition lighting the burner. When the burner is lit, the thermostat will control the temperature.
- When the griddle is preheated, the griddle indicator light will go out. The light will cycle on and off as the thermostat requires more heat to maintain the set temperature. This will allow heat to be evenly distributed and the griddle to maintain the set temperature.
- The double griddle has two burners with separate control knobs that act independently of each other. If only one griddle is being used, there will be some heat transfer to the inactive griddle.
- To turn the griddle off, turn the control knob clockwise to the OFF position.



Griddle control knob.


Infrared Griddle

GRIDDLE CARE

- Using a metal spatula, scrape grease into the grease collection tray.
- When the surface has cooled, wipe it with a paper towel to remove excess grease or oil.
- Scrape the griddle clean. Pour ¹/₂ cup (118 ml) warm water and 1 teaspoon (5 ml) griddle cleaner onto the griddle and scrape the grease into the grease collection tray. Rinse the griddle with ¹/₂ cup (118 ml) warm water and dry with paper towels.
- Clean the grease collection tray on the drip tray and drain hole after each use. Do not allow grease to accumulate in the tray and become a fire hazard.
- To remove the grease collection tray, slide the drip tray out, then lift out the grease collection tray. Clean the grease collection tray with soapy water and a clean cloth. Refer to the illustration below.
- Apply a small amount of peanut or vegetable oil to the griddle with a clean cloth after each cleaning.
- Occasionally, remove the seasoning and clean the griddle thoroughly. Apply a small amount of white vinegar and water to the surface while it is slightly warm. Scrub with a fine wire brush or a fine-grit griddle brick. Repeat until excess oil has been removed. Apply a light coat of oil for seasoning.

GRIDDLE COOKING GUIDE

TEMPERATURE	FOOD
200°F (95°C)	Hold cooked food at serving temperature
250°F (120°C)	Eggs
350°F (175°C)	French toast, pancakes, grilled sandwiches
375°F (190°C)	Bacon, pork chops, lamb steaks, sausage, flattened boneless chicken
400°F (205°C)	Vegetables, sliced or grated




Grease collection tray.


French Top

The optional French top provides a graduated cooking surface with the hottest temperature under the center plate and the lowest temperature near the edges. This design makes it possible to use several pans at once for a variety of cooking tasks. For example, fry chicken toward the center, while simmering a sauce in one corner and keeping vegetables warm in a different corner. Place the pan or pans toward the edge according to their contents and quantity. Refer to the illustrations below.

The cooking surface is made of polished cast iron that is an excellent heat conductor. The rings allow for the solid surface to expand with the heat while remaining flat. The rings also provide thermal breaks in the cast iron that distribute heat in a graduated intensity, hottest in the center and coolest around the edges.

To protect the cast iron surface from moisture, it is necessary to "season" the French top prior to use. This seasoning process as well as general use will change the appearance of the French top.





French top center plate.

French top heating zones.

SEASON THE FRENCH TOP

- The French top is shipped with a protective oil coating the surface, use hot water and detergent to clean.
 Rinse and dry.
- Turn on the ventilation hood five minutes prior to using the French top.
- The French top needs to go through a "burn in" period.
 Turn on the French top for 30 minutes to clean oils from the bottom side of the surface. After 30 minutes, turn the French top off and allow it to cool.
- To season, spread a light coating of peanut or vegetable oil on a towel or cloth. While surface is still slightly warm, apply oil evenly until it is absorbed into the cast iron. Be careful not to apply too much oil. Excess oil will leave a gummy residue that will have to be removed.
- It is normal for the cast iron to darken with use to a bluish-black color.

When this seasoning technique is applied correctly, food spatters will not stain and the surface will be protected from moisture. Its appearance darkens with use, a sign that the French top has been fully tempered and is properly seasoned. Regular maintenance will become easier.

French Top

FRENCH TOP OPERATION

IMPORTANT NOTE: The stainless steel cover must be removed prior to operating the French top.

- Turn on the ventilation hood five minutes prior to using the French top.
- To use the French top, push and turn the control knob counterclockwise to the HIGH setting. You will hear the clicking sound of the igniter lighting the burner.
- Preheat for 25 to 30 minutes before cooking on the French top. This allows the solid cast iron plate to heat thoroughly.
- To raise or lower the cooking heat, slide the pan either toward (higher heat) or away from (lower heat) the center plate. This gives you total control over the most delicate sauces. It is not necessary to adjust the flame height.
- To turn the French top off, turn the control knob clockwise to the OFF position.

FRENCH TOP COOKING TIPS


- Always cook in pans. Do not cook food directly on the surface.
- Never remove the center plate when cooking.
- When bringing large amounts of water to a boil, it is fastest to do it on one of the surface burners.

A CAUTION

Never leave pans on a high heat zone unattended. Be cautious when cooking food in fat or grease. It can become hot enough to ignite.

FRENCH TOP CARE

- It is best to maintain a seasoned surface to protect the cast iron from moisture.
- Clean the entire surface after each use while it is slightly warm. Wipe the surface with a mild detergent and water. Rinse and dry.
- Maintain the French top as you would a cast iron skillet; keep it free from moisture.
- Reapply a light coating of peanut or vegetable oil to the French top after each use until a sheen develops.
- Occasionally, remove the seasoning and clean the French top thoroughly. Apply a small amount of white vinegar and water to the surface while it is slightly warm. Scrub and repeat until excess oil has been removed. Apply a light coat of oil for seasoning.
- The French top burner is located below the center plate. The plate remains in place during cooking but it can be lifted off to check or service the burner. Use the center plate hook provided with your rangetop as shown in the illustration below.




Center plate removal.

Care Recommendations

DRIP PAN REMOVAL

The drip pan removal hook is provided with the gas rangetop to lift and remove the drip pan for cleaning.

To remove the drip pan, first remove the cast iron grates. Insert the vinyl-coated end of the drip pan removal hook into one of the oblong holes in the drip pan. Lift upward and set the drip pan aside for cleaning. Refer to the illustration below.



Drip pan removal.

RANGETOP CLEANING TIPS

- Wait until surfaces are cool before cleaning.
- For best results, wipe up spills and spatters as they
 occur and immediately after the rangetop has cooled.
 If splatters are allowed to cook on, they may permanently damage or stain the finish.
- Use a spray degreaser to remove fingerprints and greasy spatters. Spray on a cloth and wipe the surface.
 Buff dry immediately to avoid streaking. For hard water stains, use white vinegar and water.
- If in doubt about using one of your cleaners, check the label. To check if it is safe to use on your range, try a small amount on an inconspicuous area.
- Use caution when spraying cleaners. Some contain caustic ingredients that can damage adjacent parts and finishes. Protect the adjacent parts by masking them off to avoid damage by overspray.
- · Do not spray cleaners on control knobs or igniters.
- Refer to care recommendations on the following page for specific care instructions for rangetop components.
- Refer to pages 12–18 for specific care instructions for the charbroiler, griddle and French top.

Gas Rangetop Care 20

Care Recommendations

STAINLESS STEEL EXTERIOR

Rangetop exterior, riser and trim.

- Do not use abrasive cleaners; they will permanently scratch stainless steel surfaces. Salt and some cooking liquids may pit and stain the surface. Remove these spills immediately.
- Use a spray degreaser to remove fingerprints and greasy spatters. Spray on a cloth and wipe the surface.
 Buff dry immediately to avoid streaking. For hard water stains, use white vinegar and water.
- For general cleaning, use a soft, nonabrasive stainless steel cleaner like Signature polish and apply with a soft lint-free cloth. To bring out the natural luster, lightly wipe the surface with a water-dampened microfiber cloth followed by a dry polishing chamois. All work should follow the grain direction of the finish. Better results are obtained by keeping the cloth in continuous contact with the stainless steel.
- Signature polish is available from Signature Limited Laboratory, P. O. Box 13436, Dayton, Ohio 45413, or call 877-376-5474.

GENERAL CLEANING

Burner drip pan.

 Do not use abrasive cleaners; they will permanently scratch porcelain enamel surfaces. Use a clean cloth or sponge and wipe the surface with warm water and a mild detergent. Rinse and dry immediately.

Burner grates.

 Remove burner grates and clean with a nonabrasive cleaner such as liquid detergent in hot water or a paste of baking soda and water. Spray degreasers and mild abrasive cleaners may be used.

Burner base.

 Wash in warm water and liquid detergent or mild abrasive cleaner. Rinse and dry.

Spark igniters.

 Keep dry; never spray water or cleaner directly on the igniter. When cleaning surface burners, avoid contact with the igniter.

Control knobs.

Wipe control knobs with a damp cloth and mild detergent and water; rinse and dry. Do not soak the knobs or use abrasive cleaners, they will scratch the finish and remove markings.

Control panel.

 Use a spray degreaser to remove fingerprints and food soils. Spray on a cloth and wipe the panel. Do not spray directly on the panel around valve stems.

Cookware Selection

For best results, we recommend medium- to heavy-weight cookware. Pans should have a flat base, metal handle and good-fitting cover. Look for pans that are made of materials with good heat conductivity, such as aluminum and copper. Use the following guidelines when selecting cookware:

- Select deep pans with high sides rather than ones with wide bases and low sides to avoid boilovers.
- Cover pans while cooking to improve cooking efficiency. Water boils faster, using less fuel, and the kitchen stays cooler.
- Select lower flame settings when using pans made of cast iron, enameled steel or glass ceramic, or pans coated with a nonstick finish. High heat may cause "hot spots", scorching and burning.
- Pans with oversize bases that extend beyond the rangetop frame should not be used. On high settings, heat may be trapped beneath the pan causing permanent damage to the surface finish.
- For ease in handling, use front burners for larger pans.
- Use a wok with a flat bottom.

Troubleshooting

If your Wolf gas rangetop is not operating properly, use the following troubleshooting guide before calling your Wolf authorized service center. This guide will save you time and trouble and may help you avoid the expense of a service call.

Rangetop does not operate.

- Check that the electrical connection to the rangetop has not been disconnected, or if the household fuse or circuit breaker has been blown or tripped.
- A power outage may have caused a disruption in service.

Burner flame does not burn evenly.

 Burner parts may not be assembled correctly. Refer to burner assembly on page 9.

Burner fails to ignite.

· Igniter is damp. Allow it to dry completely.

Burners extinguish themselves when using more than one large pan simultaneously.

 Good gas combustion requires the correct amount of airflow to maintain the flame. Using two oversized pans simultaneously restricts air movement.

Food boils or burns more in one area of a pan.

- Pan is not centered above the burner or base of pan does not rest flat on the burner grate.
- · Pan does not conduct heat evenly.

Water does not come to a boil fast enough.

- · Cover pan for most efficient use of the high setting.
- Diameter of pan is too large or base of pan is warped.

Service Information 22

Service Information

When requesting information, literature, replacement parts or service, always refer to the model and serial number of your gas rangetop. This information is found on the product rating plate. The rating plate is located under the drip pan that supports the cooking grates, inside the left side panel of the rangetop. Refer to the illustration on page 3. The rating plate for French top models (except model RT484F) is located inside the right side panel. Record the rating plate information below for future reference.

Nodel Number:
Serial Number:
nstallation Date:
Volf Authorized Service Center:
Phone:
authorized Wolf Dealer:
Phone:

BEFORE CALLING FOR SERVICE

Before calling a Wolf authorized service center, refer to the troubleshooting guide on page 21.

PRODUCT REGISTRATION

Register your new Wolf product today so that we may ensure your satisfaction. You may register by one of the following options:

- 1) Mail in the completed Wolf product registration card.
- 2) Register online at wolfappliance.com.
- 3) Register by phone by calling Wolf customer service at 800-222-7820.

The model and serial numbers of your appliance are printed on the enclosed Wolf product registration card. If you provide us with your e-mail address, we will send you exciting new product updates and recipes as they become available, along with information on special events.

The information and images in this guide are the copyright property of Wolf Appliance, Inc. Neither this guide nor any information or images contained herein may be copied or used in whole or in part without the express written permission of Wolf Appliance, Inc. ©Wolf Appliance, Inc. all rights reserved.

Wolf Appliance Products Limited Warranty

RESIDENTIAL USE ONLY

FULL TWO YEAR WARRANTY*

For two years from the date of original installation, your Wolf Appliance product warranty covers all parts and labor to repair or replace any part of the product that proves to be defective in materials or workmanship. All service provided by Wolf Appliance under the above warranty must be performed by a Wolf authorized service center, unless otherwise specified by Wolf Appliance. Service will be provided in the home during normal business hours.

LIMITED THIRD THROUGH FIFTH YEAR WARRANTY

From the third through fifth year from the date of original installation, Wolf Appliance will repair or replace the following parts that prove to be defective in materials or workmanship: gas burners (excluding appearance), electric heating elements, blower motors (ventilation hoods), electronic control boards, magnetron tubes and induction generators. Labor to remove and replace defective parts is not covered. Wolf Appliance recommends that you use a Wolf authorized service center to perform such service.

LIMITED LIFETIME WARRANTY

For the life of the product, Wolf Appliance will repair or replace any outdoor gas grill body or hood that rusts through due to defective material or workmanship. Labor to remove and replace defective parts is not covered. Wolf Appliance recommends that you use a Wolf authorized service center to perform such service.

TERMS APPLICABLE TO EACH WARRANTY

The warranty applies only to products installed for normal residential use. The warranty applies only to products installed in any one of the fifty states of the United States, the District of Columbia or the ten provinces of Canada. This warranty does not cover any parts or labor to correct any defect caused by negligence, accident or improper use, maintenance, installation, service or repair.

THE REMEDIES DESCRIBED ABOVE FOR EACH WARRANTY ARE THE ONLY ONES THAT WOLF APPLIANCE, INC. WILL PROVIDE, EITHER UNDER THIS WARRANTY OR UNDER ANY WARRANTY ARISING BY OPERATION OF LAW. WOLF APPLIANCE, INC. WILL NOT BE RESPONSIBLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM THE BREACH OF THIS WARRANTY OR ANY OTHER WARRANTY, WHETHER EXPRESS, IMPLIED OR STATUTORY.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other legal rights that vary from state to state.

To receive parts and/or service and the name of the Wolf authorized service center nearest you, contact Wolf Appliance, Inc., P.O. Box 44848, Madison, WI 53744; check the contact & support section of our website, wolfappliance.com or call 800-332-9513.

*Stainless steel doors, panels, handles, product frames and interior surfaces are covered by a limited 60-day parts and labor warranty for cosmetic defects.



